Fast Plate

Assembly Instructions



Items included



Step 1





Attach the license plate mount to the switch mechanism

Step 2








Screw it together using the M4x25 along with the nut and washer.

Step 3

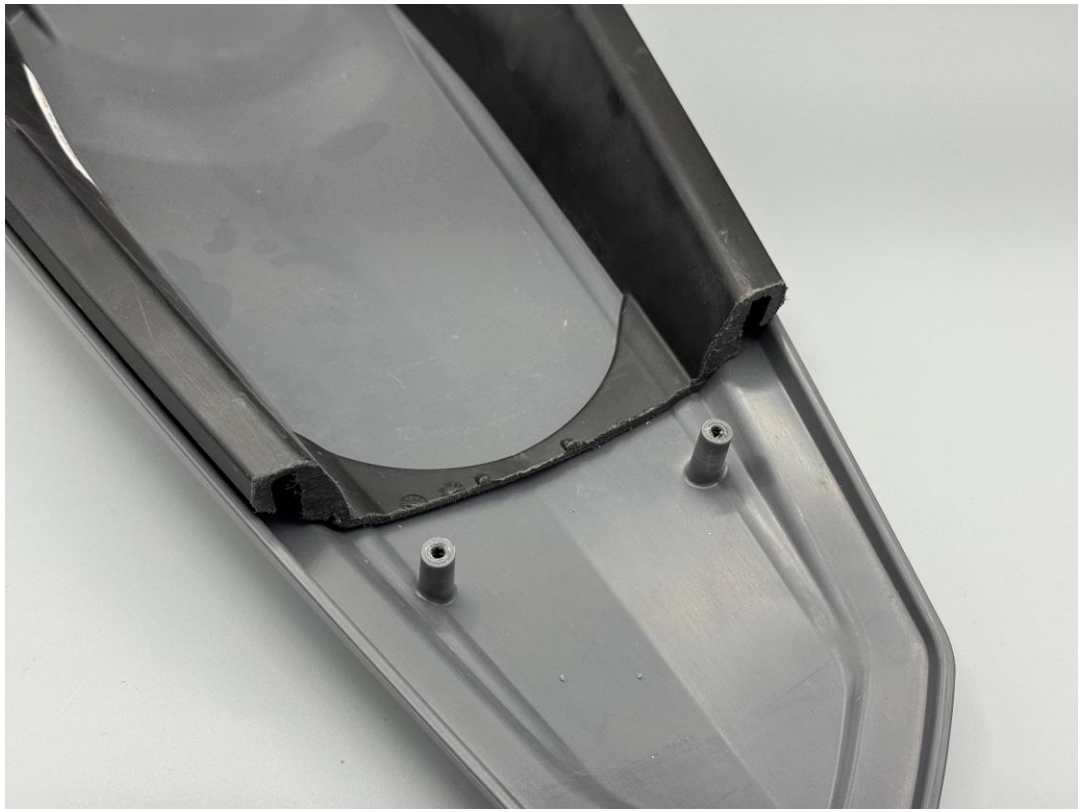



Place the plate holder onto the original mounting point on the rear fender.
Optionally: you can cut the original plate holder as shown in the picture for a cleaner look and to keep the wires hidden.


Step 4





Secure it with the PT screws.

Done!

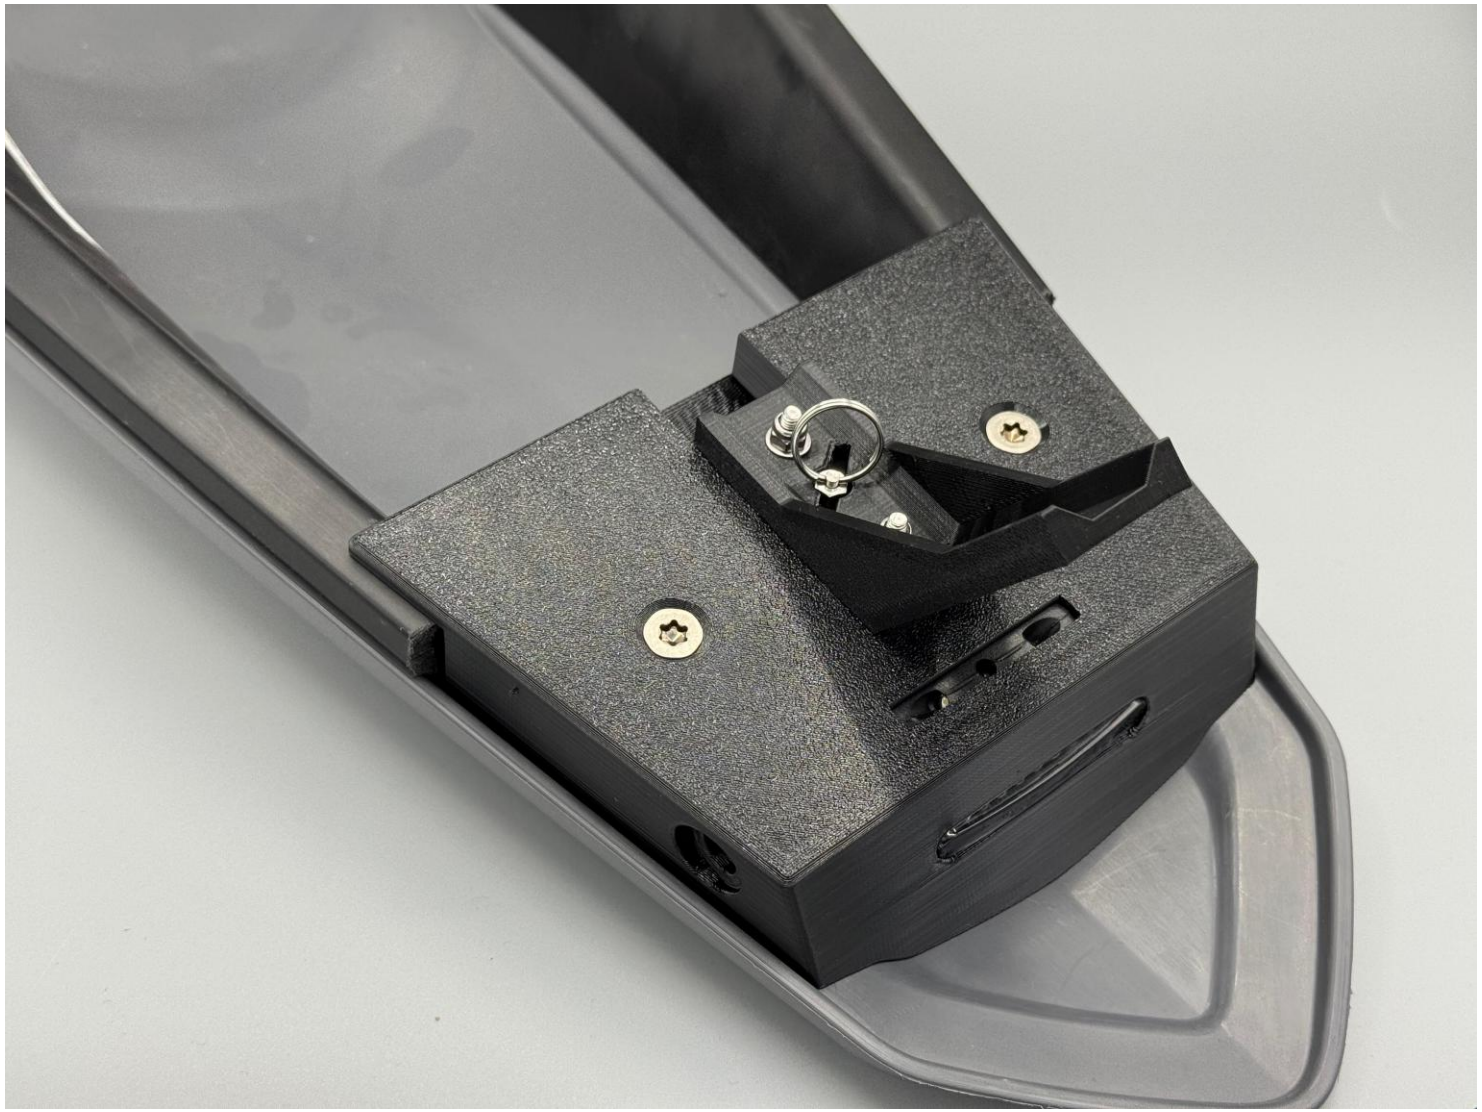



These are turn signal spacers that increase the distance.

